


# SCHMIDT BENDER

## 3-12x54 PM II Ultra Bright




**NEW**

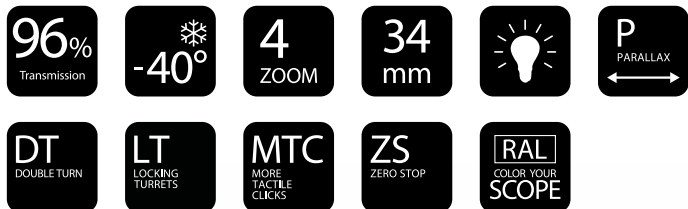

- With more than 96 % transmission, target identification succeeds even in bad light conditions
- The ultra-flat double turn turret allows use of backpacked red dot sight
- 270 cm adjustment range in the turret and a precise parallax adjustment allow use over long distances

## 1. Dimensions & physical properties

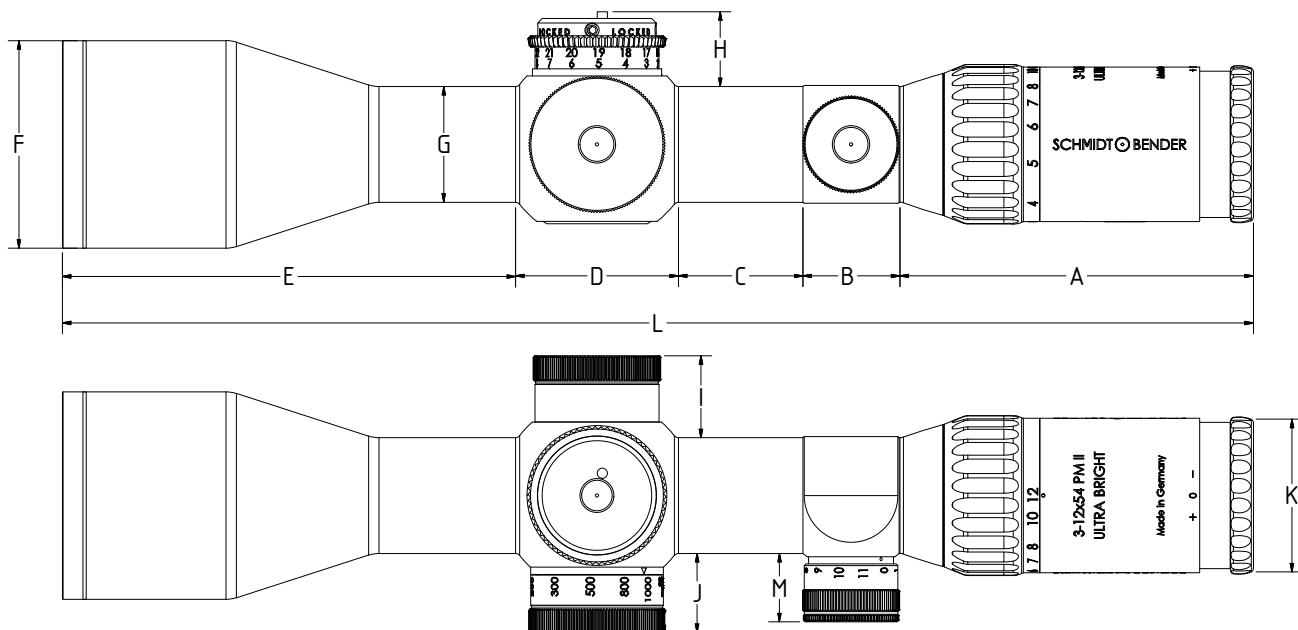

	A	B	C	D	E	F	G	H	I	J	K	L	M
mm	104,89	28,49	36,60	47,87	133,16	61	34	22	24,10	23,20	45	351	20,10
inch	4,13	1,12	1,44	1,88	5,24	2,40	1,34	0,87	0,95	0,91	1,78	13,82	0,79

Weight: 32.52 oz

Length: 13.82"

Main tube diameter: 34 mm

## 2. Optical Data<sup>⊛</sup>

Magnification: 3.0 - 12.0

Objective diameter: 54 mm

Field of view: 37.50 ft - 9.30 ft / 100 yd

Exit pupil: 0.47" - 0.18"

Eye relief: 3.54"

Twilight factor: 12.7 - 25.5

Transmission: 96 %

Focal plane: 1<sup>st</sup>

## 3. Adjustments<sup>⊛</sup>

Diopter: -2 dpt. to +3 dpt.

Adjustment range elevation turret: 270 cm / 66 MOA

Adjustment range windage turret: ± 60 cm / ± 15 MOA

Parallax: 32.81 yd - ∞

#### 4. Environmental properties<sup>✳</sup>

Waterproof: 9.84 ft / 82.02 ft on request

Temperature range:

Storage: -67° F to +158° F

Function: -40° F to +140° F

#### 5. Available configurations<sup>✳</sup>

a.) Turrets:

Elevation: Double turn with MTC and locking function

Windage: Single turn with zero stop and protective cap

Turret configurations

Elevation	Windage
1 cm cw	1 cm cw
1 cm ccw	1 cm ccw
¼ MOA cw	¼ MOA cw
¼ MOA ccw	¼ MOA ccw

b.) Colors:

- Black
- Pantone 7504M
- RAL 8000

c.) Illumination

- Illuminated

d.) Reticles

- Tremor3 • P3L • P4LF
- Other reticles available on request!

**More configurations on request!**

# SCHMIDT BENDER

**Schmidt & Bender GmbH & Co. KG**

Am Grossacker 42 | D - 35444 Biebertal, Germany  
Phone: +49 (0) 6409 - 8115 - 0 | Fax: +49 (0) 6409 - 8115 - 11  
info@schmidt-bender.de | www.schmidt-bender.de