

SCHMIDT BENDER

12-50x56 PM II

34
mm

5
ZOOM

P
PARALLAX
← →


DT
DOUBLE TURN

MT
MULTITURN

NEW



1. Dimensions & physical properties

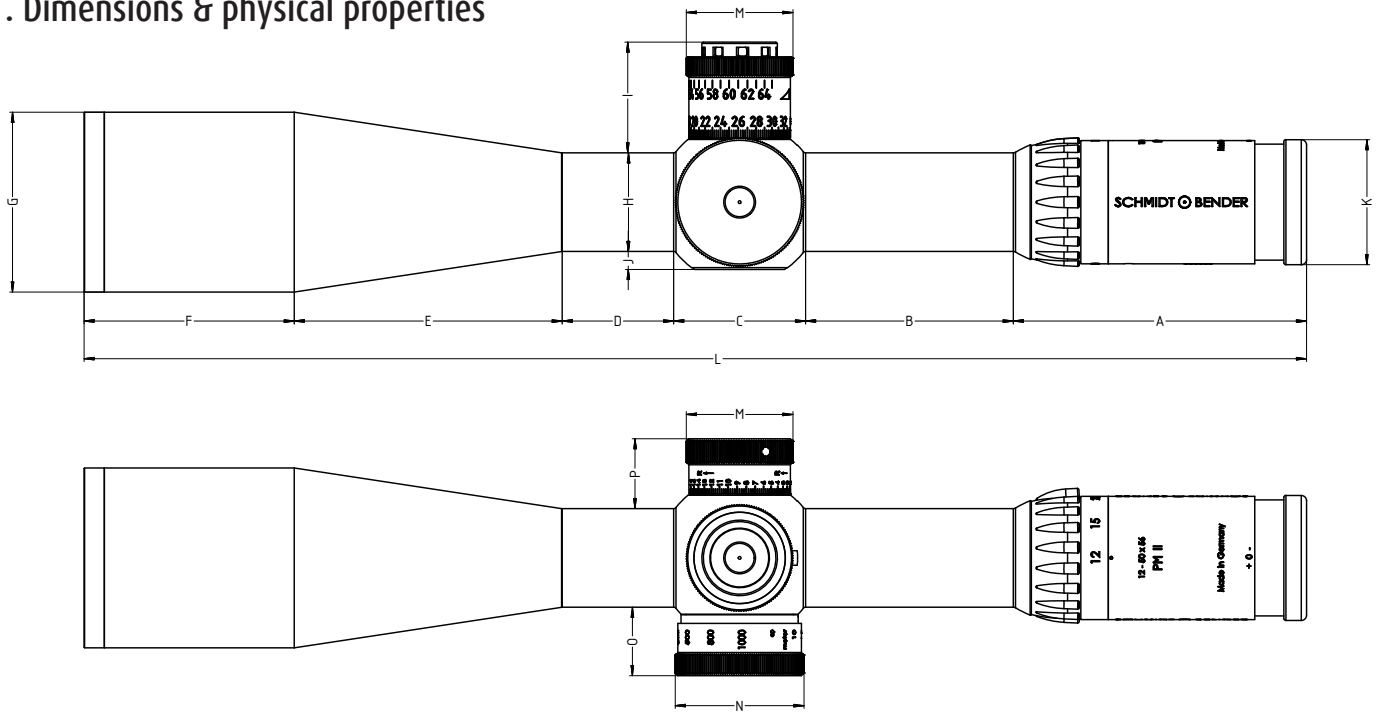

Einheit	A	B	C	D	E	F	G	H	I	J	K	L	M	N
mm	101,1	71,6	45,5	38,4	92,4	72,5	62	34	38,2	6,2	43,1	421,6	36,8	44,4
inch	3,980	2,819	1,791	1,512	3,638	2,854	2,441	1,339	1,504	0,244	1,697	16,598	1,449	1,748

Weight: 39.15 oz

Length: 16.42"

Main tube diameter: 34 mm

2. Optical Data*

Magnification: 12.0 - 50.0

Objective diameter: 56 mm

Field of view: 12.60 m - 3.30 m / 100 yd

Exit pupil: 0.18" - 0.05"

Eye relief: 2.76"

Twilight factor: 25.9 - 52.9

Transmission: 90 %

Focal plane: 1. o. 2.

3. Adjustments*

Diopter: -2 dpt. bis +3 dpt.

Adjustment range elevation turret: 65 MOA (DT) / 75 MOA (MT)

Adjustment range windage turret: ± 16 MOA

Parallax: 9.84 yd - ∞

4. Environmental properties*

Waterproof:	9.84 ft
Temperature range:	
Storage:	-67° F bis +158° F
Function:	-13° F bis +131° F

5. Available configurations

a.) Turrets:

Elevation: Double Turn (Multi Turn)

Windage: Single Turn

Turret configurations

Elevation	Windage
¼ MOA cw	¼ MOA cw
¼ MOA ccw	¼ MOA ccw
⅛ MOA cw (MT)	¼ MOA cw
⅛ MOA ccw (MT)	¼ MOA ccw

b.) Colors:

- Black

c.) Illumination

- no

d.) Reticles

- Focal plane 1: P3, P4F
- Focal plane 2: P3, P4F, Sport, SportF
- Other reticles available on request!

More configurations on request!

SCHMIDT BENDER

Schmidt & Bender GmbH & Co. KG

Am Grossacker 42 | D - 35444 Biebertal, Germany
Phone: +49 (0) 6409 - 8115 - 0 | Fax: +49 (0) 6409 - 8115 - 11
info@schmidt-bender.de | www.schmidt-bender.de