

# SCHMIDT BENDER

## 3-12x54 PM II Ultra Bright

96%  
Transmission

-40°  


4  
ZOOM

34  
mm



P  
PARALLAX  


DT  
DOUBLE TURN

LT  
LOCKING  
TURRETS

MTC  
MORE  
TACTILE  
CLICKS

ZS  
ZERO STOP


RAL  
COLOR YOUR  
SCOPE

**NEW**



- With more than 96 % transmission, target identification succeeds even in bad light conditions
- The ultra-flat double turn turret allows use of backpacked red dot sight
- 270 cm adjustment range in the turret and a precise parallax adjustment allow use over long distances

## 1. Dimensions & physical properties

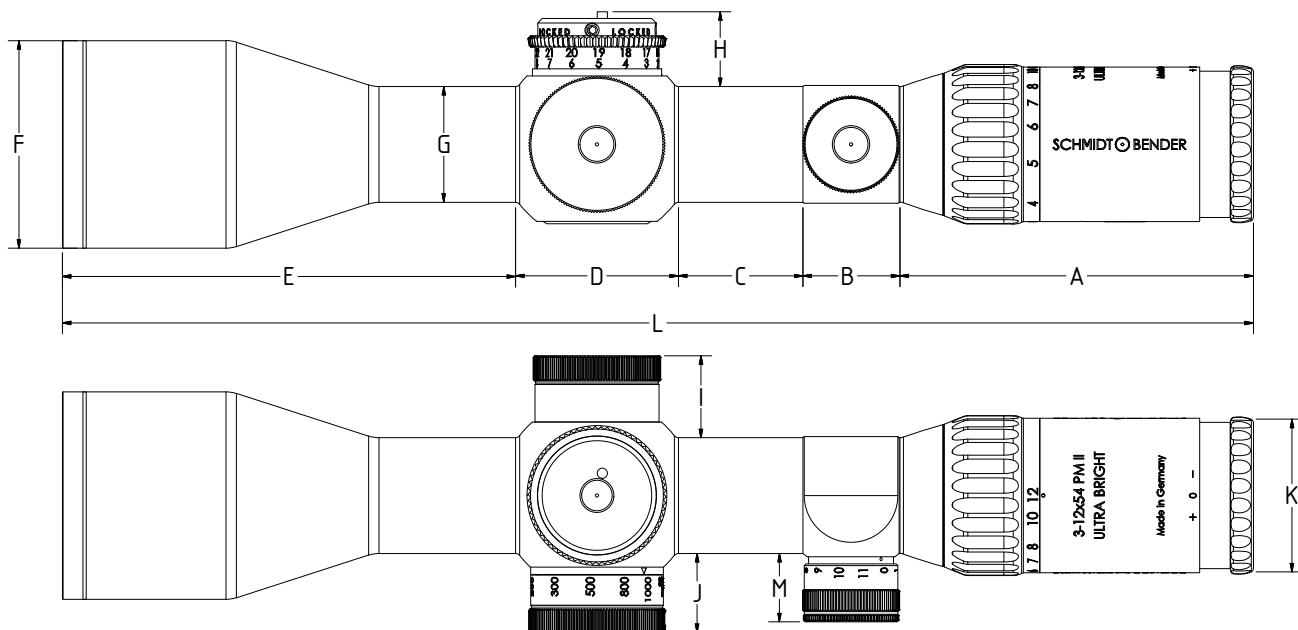

	A	B	C	D	E	F	G	H	I	J	K	L	M
mm	104,89	28,49	36,60	47,87	133,16	61	34	22	24,10	23,20	45	351	20,10
inch	4,13	1,12	1,44	1,88	5,24	2,40	1,34	0,87	0,95	0,91	1,78	13,82	0,79

Weight: 922 g  
 Length: 351 mm  
 Main tube diameter: 34 mm

## 2. Optical Data<sup>⊛</sup>

Magnification: 3.0 - 12.0  
 Objective diameter: 54 mm  
 Field of view: 12.5 m - 3.1 m / 100 m  
 Exit pupil: 12.0 mm - 4.5 mm  
 Eye relief: 90 mm  
 Twilight factor: 12.7 - 25.5  
 Transmission: 96 %  
 Focal plane: 1<sup>st</sup>

## 3. Adjustments<sup>⊛</sup>

Diopter: -2 dpt. to +3 dpt.  
 Adjustment range elevation turret: 270 cm / 66 MOA  
 Adjustment range windage turret: ± 60 cm / ± 15 MOA  
 Parallax: 30 m - ∞

#### 4. Environmental properties<sup>\*</sup>

Waterproof: 3 m / 25 m on request

Temperature range:

Storage: -55° C to +70° C

Function: -40° C to +60° C

#### 5. Available configurations<sup>\*</sup>

a.) Turrets:

Elevation: Double turn with MTC and locking function

Windage: Single turn with zero stop and protective cap

Turret configurations

Elevation	Windage
1 cm cw	1 cm cw
1 cm ccw	1 cm ccw
¼ MOA cw	¼ MOA cw
¼ MOA ccw	¼ MOA ccw

b.) Colors:

- Black
- Pantone 7504M
- RAL 8000

c.) Illumination

- Illuminated

d.) Reticles

- Tremor3 • P3L • P4LF
- Other reticles available on request!

**More configurations on request!**

# SCHMIDT BENDER

**Schmidt & Bender GmbH & Co. KG**

Am Grossacker 42 | D - 35444 Biebertal, Germany  
Phone: +49 (0) 6409 - 8115 - 0 | Fax: +49 (0) 6409 - 8115 - 11  
info@schmidt-bender.de | www.schmidt-bender.de